

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61K 9/50, B01J 2/00	A1	(11) International Publication Number: WO 99/61006 (43) International Publication Date: 2 December 1999 (02.12.99)
(21) International Application Number: PCT/EP99/03512 (22) International Filing Date: 21 May 1999 (21.05.99) (30) Priority Data: 98109349.5 22 May 1998 (22.05.98) EP (71) Applicant (for all designated States except US): EURAND INTERNATIONAL S.P.A. [IT/IT]; Via Martin Luther King, 13, I-20060 Pessano con Bornago (IT). (72) Inventors; and (75) Inventors/Applicants (for US only): CORNELLI, Livio, Maria [IT/IT]; Via Don Mazzolari, 19/A, I-26025 Pandino (IT). LA GRASTA, Giovanni [IT/IT]; Via Delle Magnolie, 73, I-36040 Torri Di Quartesolo (IT). MARCONI, Marco, Giuseppe, Raffaele [IT/IT]; Via A. Lincoln, 22, I-20092 Cinisello B (IT). (74) Agent: GERVASI, Gemma; Notarbartolo & Gervasi, Corso Porta Vittoria, 9, I-20122 Milano (IT).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>
(54) Title: LAYERING PROCESS AND APPARATUS THEREFOR (57) Abstract The invention concerns a process and apparatus for applying a layer to a pharmaceutical unit such as a seed or tablet which comprises: (a) coating the unit with particles of drug and/or excipient; the unit and the particles optionally being at different electrical potentials such that electrostatic attraction occurs between them; (b) applying to the unit a binding solution; and (c) drying.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

LAYERING PROCESS AND APPARATUS THEREFOR

5 The present invention relates to a new layering process, in particular to a process for the manufacture of multiparticulate solid oral dosage forms based on a dry spray layering technique optionally with electrostatic attraction. The invention also relates to an apparatus for use in the process.

10 BACKGROUND OF THE INVENTION

15 Layering processes involve loading solid inert cores with drugs and/or excipients. Inert cores, placed in a suitable vessel such as a coating pan or a fluid bed, may be layered according to different methods. Some methods consist of spraying onto the cores a solution/suspension containing both drug and binding agent. Others are based on layering the drug directly in powdery form where drug loading occurs by gravity and adhesion is ensured by a liquid binder sprayed onto the cores. Some examples concerning different layering processes are described in the following patents: WO 95/14460, WO 96/01621.

20 The layering process is particularly suitable for production of small drug loaded units, multiples of which are placed into capsules for patient delivery. In the case of spherical inert cores such as non pareils, the layering techniques from solution/suspensions, produce homogeneous drug loaded particles, which retain an approximately spherical shape. They are therefore particularly suitable for successively film coating to build up the particle with the aim of providing a desired drug release profile. These spraying methods based on liquid applications are very time consuming due to the relative low concentration of the active substance in the liquid vehicle and the need to evaporate large amounts of solvent. In addition they are subject to process and product variables. Also it is preferable that liquid layering methods are based on aqueous systems; nevertheless organic solvents are often used for those active substances having poor aqueous solubility. A process using organic solvent has disadvantages of high costs, environmental pollution and explosion hazard. Drug state transitions can also occur either during or after the liquid spraying phase. As a result, crystalline drugs once loaded on inert cores, may assume a different crystalline state or even a metastable amorphous state, both altering the drug release profile on storage.

35

Known powder layering techniques based on drug loading by gravity overcome some of the above-mentioned drawbacks. However limiting factors accompany the use of powder

- 2 -

layering such as non-uniform distribution of the drug onto the seeds, and high dust formation during the process which lowers the yields and requires the process to be run discontinuously with intermediate drying. This is necessary to avoid sticking or agglomeration of individual cores, but is very time consuming if an adequately deep layer is to be loaded onto the cores. A typical industrial process may take in the order of 24 hours.

The non-uniform drug distribution gives rise to single loaded units with irregular shape and rough surface and causes an increment of the products surface specific area (SSA). An increase of the SSA means a higher spray volume must be applied to get the desired average thickness. Poor reliability from batch to batch is also associated with such a layering system. Moreover, when coating is based on weight gain, the poor batch reproducibility gives rise to finished products with a variable average film thickness and therefore the resulting units will each have different release profiles. Where a final sealing coating is required, the volume of sealant is increased due to high surface area of the units.

Additionally, known powder layering techniques produce a rather considerable dust formation which tends to be suspended on the air stream during the process. This dust problem is also responsible for cross-contamination and safety hazards for the operators, as well as loss of active substance through the exhaust of the ventilation system.

Another disadvantage of powder layering is that the poor reliability requires time-consuming procedures to get satisfactory results in matter of process validation. This is necessary to meet requirements of medicine control agencies.

There is need therefore for a process for applying a drug or excipient layer to a unit or seed particle with improved layering times over solution/suspension coating techniques.

There is also a need for a process to prepare spherical dosage forms with improved regularity of shape.

Furthermore there is a need for a process for preparing multiple units dosage forms with consistent properties and improved reliability of the units.

The present invention provides a process for applying a layer to a pharmaceutical unit, such as a seed unit or tablet, which comprises:

- 3 -

- (a) spraying the unit with dry particles of drug and/or excipient,
- (b) applying to the unit a binder comprising solvent,
- and
- (c) drying.

5

Steps (a) and (b) can be initiated, and/or terminated, sequentially in either order or simultaneously. Generally once the process has started steps (a) and (b) are run simultaneously for sufficient time to load the desired amount of drug onto the pellet. During simultaneous loading (ie steps (a) and (b) running for a period together) it is possible to reach an equilibrium where solvent evaporates or dries at a rate substantially equal to the rate of binder application.

Conveniently the binder is applied before the powder application starts, for example about 20 seconds or less before, eg about 10 seconds before, and is terminated preferably after the powder spraying has stopped to ensure all drug has been applied and to minimise loss. Drying may continue until substantially all solvent is removed.

Powder atomisation ensures a homogeneous drug loading and an enhanced sphericity.

In one aspect of this invention when coating the unit with particles of drug and/or excipient; the unit and the particles are at different electrical potentials such that electrostatic attraction occurs between them;

Optionally, the dry particles may be electrically charged with respect to the unit.

25

Accordingly this invention also provides a process for applying a layer to a pharmaceutical unit (eg seed or tablet) which comprises:

- (a) spraying the unit with dry particles of drug and/or excipient, the unit and the particles being at different electrical potentials such that electrostatic attraction occurs between them;
- (b) applying to the unit a binder,
- and
- (c) drying.

35

- 4 -

As above steps (a) and (b) can be carried out, and/or initiated, sequentially in either order or simultaneously.

5 Spraying in the manner described herein permits layering to substantially the whole surface of the unit in a single operation.

Electrostatic attraction can minimise dust formation, and thus there is reduced loss of active substance through the exhaust of the ventilation system. Furthermore, the particles are strongly attracted to the seed units, and consequently the volume of particles carried off
10 during evaporation of the binder is reduced. However an electric charge is unsuitable in cases where an organic solvent is used for the binder, and accordingly, in such cases the invention can be used without applying a charge.

The present invention is particularly suitable for the production of pharmaceutical units with
15 high drug loading. Such a method ensures high reliability while improving the productivity in comparison with known powder layering processes. It finds broad applicability on drug loading of inert cores such as non pareils seeds or granules on the manufacturing of multiparticulate dosage forms. Layering of monolithic dosage forms such as tablets is however possible, eg tablets up to about 20mm in length. Drug particles
20 are sprayed through a nozzle connected with an air flow inlet. Particles are thus atomized onto inert seeds loaded on conventional equipments such as for instance coating pans beds. This system ensures uniform layering, and improved process productivity in comparison with known powder layering techniques based on gravity loading when processing the same quantity of components in the same coating bowl.

25 Preferably the powder and binder are applied from different directions, or in the same direction but along separate axes. This can avoid over wetting and thus sticking or agglomeration. As a result process time can be reduced significantly being strictly dependent on spraying rates of powder and binder.

30 The potential difference between the unit and the particles, if applied, should be sufficiently high to ensure a strong attraction between the two and may conveniently be in the order of from about 50,000 to about 300,000 volts, preferably about 75,000 to 200,000 volts. Since it is not necessary for both the unit and the particles to be electrically charged the
35 process may be conveniently carried out by electrostatically charging one of the unit and the

particles. Preferably the particles are electrostatically charged, most preferably with a negative charge.

Preferably the particles are applied by spraying onto a plurality of units in a coating drum.

- 5 Improved results are obtained where the particles are in the form of a powder with a maximum particle size of about 250 microns or less, preferably about 150 microns or less, most preferably about 100 microns or less.

- 10 On startup drug loading is preferably preceded by a wetting of the non pareil seeds ensured by the binder/solvent. In operation the binding solution is preferably sprayed onto the units simultaneously with the application of the powder particles.

- 15 The process is particularly suitable for layering units such as non-pareil seeds where the substantially spherical form of the seed is retained to a high degree during layering with the result that each multi-layered dosage unit produced is substantially spherical.

- Any suitable binder used in the preparation of pharmaceutical dosage forms can be used including for example polyvinylpyrrolidone, polyethylene glycol, polyvinyl alcohol, hydroxypropylcellulose, hydroxypropylmethylcellulose, hydroxyethylcellulose, 20 methylcellulose, ethylcellulose, polyacrylates, carboxymethyl-cellulose or gelatine or mixtures thereof. Conveniently the binder is dissolved in a solvent to a suitable concentration. Where the powder being applied is sufficiently soluble in water (or other solvent) then the binder solution can consist solely of water (or other solvent) without added ingredient.

25

In a preferred embodiment this invention provides a process for preparing a multi-layered pharmaceutical seed unit which comprises the following steps:

- a) loading inert nonpareil seeds into a suitable coating apparatus optionally electrostatically earthed,
- 30 b) dry spraying drug and/or excipient particles optionally electrostatically charged, onto the seeds using a spraying nozzle, while simultaneously applying a binding solution,
- c) drying the loaded cores;
- to provide the multi-layered pharmaceutical seed unit.

- 35 This invention also provides apparatus for preparing said layered pharmaceutical seed units.

The apparatus comprises a vessel adapted to receive a seed unit, and loading means for layering said unit with particles, wherein said loading means comprises a powder spraying jet for dry spraying particles at said unit.

- 5 Optionally the powder layering may use an electrostatic potential difference to improve particle adhesion. This level of adhesion may be varied by adjusting the electrostatic charge. Preferably a plurality of seed units are provided.

- 10 Optionally, the powder layer can be sealed or coated in any known manner for example by using a final spray of liquid sealer, or by incorporating a waxy substance in the powder coating which is softenable on application of heat. The latter method may not be suitable if the active substance is heat sensitive.

- 15 Preferably the apparatus includes a fluid binder spray for ensuring adhesion of the particles to the units. Such a spray allows a build up of successive layers of particles on the units. The binder spray may be applied before, during or after spraying of the particles.

- 20 Separate spraying of powder and binder allows independent variation of flow rate and spray duration, which may be very useful in controlling process variables and permitting active control of the process according to real time measurements. The binder spray nozzle may also be used for spraying other coatings and or sealing layers. Independent spray control also facilitates variation of the volume of liquid spray according to need, and to the size and absorbency of the seed units.

- 25 Ventilation of the coating vessel is preferred, especially where evaporation of liquid is required. In a preferred embodiment low pressure forced air ventilation is provided, and this allows further process control by variation of air pressure, flow rate and ventilation on/off periods. The ventilation air may also be pre-heated to a desirable level; this allows further control of process variables.

- 30 In the preferred embodiment, the layering vessel is a rotatable drum with a substantially horizontal axis in which is arranged a relatively fixed array of powder spraying nozzles. The drum preferably includes internal baffles or strakes to cause the seed units to roll and intermingle. In use rotation of the drum causes a charge of seed units to lie at one side, and
35 preferably the powder spraying nozzles are orientated approximately at right angles to the surface plane of the charge. The orientation of the powder spraying nozzles may be

adjustable. Real time adjustment may be provided in any suitable manner, for example by the use of stepper motors, pneumatics or the like.

Binder spray nozzles, where provided, may also have adjustable orientation in real time.

- 5 The orientation of binder nozzles may be different from that of powder spraying nozzles, and the respective orientation may be independently variable. Where a plurality of nozzles of either type are provided, the nozzles may themselves be independently adjustable for flow rate orientation and spray pattern.

- 10 In the case of the rotatable drum, the powder spray nozzles and binder spray nozzles are preferably mounted from an end wall opposite to the usual door in the other end wall. A ventilation inlet duct may extend from one end close to the rotational axis of the drum. Radial duct arms preferably convey ventilation air close to the surface of the charge of seed units so as to blow air over the units. An exhaust outlet is preferably provided in the same
15 end wall as the inlet.

The radial duct arms do not themselves disturb or suspend the seed units, as in prior art arrangements, and these arms may include end openings or diffusers of any suitable design, to ensure adequate air flow over the charge of units.

20

- The distance between the powder spraying nozzles and the charges of seed units may be variable. Preferably this distance is variable in real time to ensure a desirable spraying pattern as the individual units grow in diameter and thus the charge volume increases, typically by 100% or more. The distance may be variable in discrete steps, or may be
25 continuously variable according to desired process parameters. Any suitable means for moving individual nozzles, or a spray bar on which such nozzles are provided, may be adopted. Suitable means may be pneumatic or electrical; however the latter would be unacceptable in the case of solvent based binder sprays because of the risk of explosion. Variation of the distance between the binder spraying nozzles and powder spraying nozzles
30 may be provided. Typically the powder spraying nozzle(s) are(is) from 70mm to 250mm in distance from the surface being sprayed, eg about 100 to 150mm. Typically the binder spraying nozzle(s) are(is) from 150mm to 450mm in distance from the surface being sprayed, eg about 250 to 350mm, preferably about 300mm.

- 35 The use of separate powder and binder spray nozzles is particularly useful because each can be independently adjusted with respect to orientation, flow rate, spray pattern, on/off time

and distance from the units and from each other. This allows very close control of process parameters.

5 A further advantage of a horizontal axis drum is that a greater charge volume can be processed according to known process variables simply by increasing drum length and incorporating additional nozzles as required. This avoids the prior art solution of increasing drum diameter, which necessarily changes process variables in a manner which may be difficult to predict.

10 In a further aspect this invention provides a substantially spherical multi-layered dosage unit comprising one or more drugs, preferably having a shape factor (as hereinafter defined) of 0.65 or more; preferably greater than 0.8; most preferably 0.84 or more, e.g. at least 0.88.

15 Other features of the invention will be apparent from the following description of a preferred embodiment shown by way of example only in the accompanying drawings in which:

Fig.1 is a photographic representation of seed units coated by a prior art powder layering technique;

20 Fig.2 is a photographic representation of a seed unit coated by a method according to the invention;

Fig.3 is a schematic representation of apparatus according to the present invention;

25 Fig.4 is a schematic transverse section through a typical coating drum incorporating the invention; and

Fig.5 is an axial section through the embodiment of Fig.4.

30 The following description refers to an embodiment in which the dry particles carry an electric charge. The apparatus is however also suitable for use with particles to which an electrostatic charge is not applied, or to which an electrostatic charge cannot be applied.

35 A preferred arrangement of apparatus is illustrated in Fig.3. A housing 11 contains a drum 12 rotatable about a horizontal axis 13 by a motor (not shown). The drum 12 has a door at

one end (the left end as viewed) to allow a charge of seed units 14 to be loaded and unloaded. Within the drum, and mounted on a stationary end wall, are an array of powder spraying nozzles 15 and binder spraying nozzles 16. Ventilation apparatus (not shown in Fig.3) is also mounted in the stationary end wall, and facilitates a flow of air through the drum for drying purposes.

The nozzles 15 may apply an electrostatic charge to the powder when required, as will be explained.

10 A bulk hopper 21 contains a supply of powder to be sprayed by the nozzles 15. Powder is supplied from the bulk hopper 21 to a supply hopper 22 by means of a screw feeder 23. The supply hopper 22 is suspended by weighing cells (not shown) on a fixed annular support 25. The cells calculate the weight of the hopper 22, and the speed of the screw feeder 23 is controlled to ensure that powder is supplied at a desired rate.

15 The supply hopper 22 has a vibrator 26 to ensure powder fluidity, and an injector 27 at the base thereof to which is connected an air line 28 for clean compressed air. Powder is entrained in the air supply and delivered to the powder nozzles 15 via supply lines 29. The nozzles 15 are also connected in electrical lines 30 to a control panel 31, for the purpose of
20 applying the electrical charge to the powder if desired.

A binder solution is conveyed from a holding tank (not shown) by any suitable method to the binder nozzles 16. The compressed air, ventilation air, vibrator and binder solutions are also controlled via the panel 31.

25 Figs. 4 and 5 illustrate a typical arrangement of components within a coating drum.

The drum 12 rotates in the direction of arrow A. As a result the inert cores 14 tend to pile up on the left side, as viewed. The drum includes discontinuous internal helical strakes (not
30 shown) which ensure effective tumbling and rotation of the cores. The drum has a door 37, fixed ends 38, 39, a rotating barrel 40 and suitable seals 41.

An air supply duct 42 supplies ventilation air via hollow side arms 43. These side arms 43 direct air over the cores to facilitate drying. An exhaust outlet 44 is provided in one end of
35 the drum. Three side arms 43 are illustrated, but more or less could be provided, as required.

5 A powder duct 45 supports and supplies four powder spraying nozzles 15; more or less nozzles could be provided according to circumstances. A binder solution duct 46 supports and supplies two binder spraying nozzles 16; again, more or less nozzles can be provided, as required.

10 The spray direction of nozzles 15 and 16 may be changed by, for example rotation of the respective supply ducts 45, 46. The nozzles may be mounted for movement towards and away from the cores, for example by pneumatic actuators.

15 In operation, a controlled weight of a drug in powder form is dispensed by the screw feeder 23 into the hopper 22 and in turn into the injector 27 connected with the air flow line 28. The air flow drives the powder particles to the application point where an electrode with an applied 100,000 volts creates an intense electrostatic field. As the powder passes through
20 the electrostatic field each particle is given a negative charge. Charged particles are thus atomized through a nozzle onto the inert cores 14 placed into the drum 12. Simultaneously the binding solution is sprayed on to the cores by the separate nozzles 16. The inert cores are electrostatically neutral and exert a strong attraction to the highly charged drug particles which evenly coat all the exposed surfaces where they remain fixed by the binder after the
25 evaporation of the binding solution solvent. As a result homogeneous drugs layers with excellent adherence and uniform thickness are obtained.

Electrostatic layering, performed by powder atomisation to ensure a continuative layering of drug particles without lag periods, further reduces the total manufacturing time in respect of
25 traditional powder layering techniques.

However, maximum productivity varies depending on layering material flow characteristics. For this reason, powdery drugs having a particle size lower than 100 microns are preferred. Preferably the process object of the present invention has been
30 developed according to the phases here below reported.

- Loading the inert cores into a suitable coating drum
- Spraying drug particles and /or excipients in powdery form onto the inert cores by using the electrostatic gun while simultaneously applying a binding solution.

35

The process may also be run intermittently, i.e. addition of the binder solution may be started, followed by a short delay before the powder addition.

5 Drug particles having poor flowability may be sprayed in mixture with pharmaceutically acceptable excipients such as diluents, lubricants, glidants, etc. Alternatively the excipients may be layered separately before or after the drug loading.

10 - Drying the loaded cores and optionally provide them with a coating membrane by using conventional methods.

To reduce agglomeration of the cores and improve the layering efficiency, both binder spray and powder addition rates need to be set conveniently depending on the drying system capacity. Evaporation conditions can be adjusted with the aid of a psychrometric chart

15 Non pareils seeds are inert spherical solid particles, for example comprising sugar and corn starch. Those having a sieve cut ranging between 14 and 100 mesh are recommended. The rheological properties of a powdery drug are influenced dramatically by the particle size. Therefore in order to ensure a satisfactory flowability during the layering phases, actives with particle size ranging from about 10 to 100 microns are preferred. The drug applied to the inert core particles ranges on weight basis from about 9:1 to about 1:9; preferably from about 6:1 to about 1:6.

25 Drug loaded core sphericity is an important factor which affects a subsequent film coating. Coating on pellets having a near spherical shape and a smooth surface gives the best results in terms of process yields and reproducibility other than lowering the total amount of membrane to get the desired release profile. Drug loaded cores in the following examples were subjected to image analysis with a CIS 100 Particle Size and Shape Analyser (Galai Production Ltd, Israel).

30 Shape factor (S), the parameter selected to characterise the drug loaded cores, is a measure of the object sharpness. It is defined numerically by the following equation:

$$S = (\text{Area} / \text{Perimeter}^2) * 4$$

- 12 -

A value of 1 corresponds to a circle whereas values approaching 0 indicate straight lines. This measurement is useful in comparing the sphericity of drug loaded cores obtained with different layering processes.

- 5 Drug loaded pellets may be successively film coated with one or more polymeric membranes having controlled release, gastro resistance, targeted release or taste masking properties. A not limiting illustrative list of coating polymers comprises: ethylcellulose, polyacrylates and polymethacrylates, polyvinylchloride, cellulose acetate, cellulose acetophthalate, hydroxypropylmethylcellulose phthalate, hydroxypropylmethylcellulose, 10 hydroxypropylcellulose, waxes, polymers of natural origin such as shellac, gelatin, xanthan gum, arabic gum and mixtures thereof.

Film coating can be carried out according to known systems such as for instance pan coating, fluid bed coating or coacervation.

15

In the case of non-electrostatic coating, for example when using an organic binder solvent, the electric charging component is not activated, and accordingly non-charged powder is sprayed at the units.

- 20 The following non-limiting examples illustrate the invention:

EXAMPLE 1

25

A diclofenac composition was prepared according to two different manufacturing process, respectively:

- (i) Powder layering
- (ii) Powder layering with an electrostatic gun

- 30 The composition is set forth in Table I

<u>Table I</u>	
Ingredients	Quantity (%)
35 Diclofenac Sodium Salt	43.5
Non pareil seeds size 26	35.1
Lactose G 200	3.3
PEG 6000	7.5
Talc	10.5
Tween 80	0.1
40 Total	100.0

(i) **Powder Layering By Gravity** (traditional method)

- 5 (a) 74.00 kg of non pareils seeds size 26 (600-800 μm) were loaded in a ventilated coating drum (Pellegrini GS 300) equipped with powder feeder, aircap spraying system (for binder solution) and peristaltic pump.

(b) Active mixture preparation

- 10 92.60 Kg of micronised diclofenac sodium salt having a particle size distribution lower than 100 μm , 22.40Kg of Talc, 7.00 Kg of Lactose were passed through a 710 μm sieve. The components were than mixed in a 500 L cube for 20 minutes at 10 rpm.

(c) Binding solution preparation

- 15 In a 100 L tank with stirring system 16.00 Kg of PEG 6000 and 0.26 Kg of TWEEN 80 were dissolved at room temperature into 64.00 Kg of purified water.

Non pareils seeds size 26 were preheated at 30°C then drug layering was carried out with discontinuous cycles. Drum speed was set at 15 rpm. Each layering cycle was performed as follows:

- 20
- spraying onto (a) an aliquot (156 g) of (c) [rate: 4.46 g/sec.]
 - post spraying pause [10 sec.]
 - powder layering via gravity feed onto (a) an aliquot (237 g) of (b) [rate: 9.48 g/sec.]

25

 - post layering pause [80 sec.]
 - drying (air capacity: 500 m³/h, air inlet temperature: 40°C) [60 sec.]

Each cycle lasted a total of 210 seconds. 514 layering cycles for a total manufacturing time of 30 hours were necessary to terminate the drug loading onto the inert cores.

- 30 Once the drug loading was terminated, the product was dried at 40°C for 6 hours, then cooled at room temperature and sifted by 1180 μm sieve.

(ii) **Electrostatic powder layering by atomisation**

- 35 (a) 74 kg of non-pareils seeds size 26 (600-800 μm) were loaded on a ventilated coating pan (drum) (Pellegrini 300) equipped with powder feeder connected with an electrostatic gun, aircap spraying system and peristaltic pump.

- (b) Quali-quantitative active mixture composition: the same as process (i)
 (c) Quali-quantitative binding solution composition: the same as process (i)

Non pareils seeds size were preheated at 30°C then drug layering was carried out with
 5 a continuous cycle. Pan speed was 15 rpm, the inlet air flow was 250 m³ /h, the
 temperature of the inlet air volume was 46°C. Steps (b) and (c) were carried out
 simultaneously by spraying the cores (a) respectively with the electrostatic gun and with
 the air cap spraying system, without resorting to intermediate drying phases as in process
 (i) above.

10 The average layering rates were the following:

(b): [3.85 g / sec]

(c): [2.53 g / sec]

The layering process lasted totally 528 minutes then the product was dried at 40°C for 6
 hours, cooled at room temperature and sifted through 1180 µm sieve.

15

Clearly layering can be performed during a daytime production run in this example,
 whereas the prior method required four to five shift working.

20

EXAMPLE 2

Diclofenac loaded pellets of Example 1 (i and ii) were successively characterised for
 powder layering efficiency and pellets sphericity. The superiority of process (ii) in
 comparison with process (i) is demonstrated by the data reported in Table II.

25

Table II

Process	Layering Processing Time (min)	Powder Layering Efficiency			Pellets Sphericity
		weight yield ¹⁾ (%)	quantifiable weigh yield ²⁾ (%)	drug loading ³⁾ (%) / RSD	shape factor
(i)	1800	89	94	91 / 3.5	0.6339
(ii)	528	96	99	95 / 1.1	0.8801

¹⁾ product sifted by 1180 µm sieve. ²⁾ product recovered at the end of the process.

³⁾ calculated analytically as a percentage of drug layered in respect of the quantity used for powder layering. Drug loading uniformity onto the inert cores is expressed by the RSD (n=10).

¹⁾ and ²⁾ were calculated as a percentage of product obtained in respect of the theoretical weight.

The difference represent the % of agglomerates (oversized rejects).

Pellets according to Example 1 (i and ii) are illustrated in Figs. 1 and 2 respectively.

10

EXAMPLE 3

In the same equipment, diclofenac loaded pellets of example 1 (processes i and ii) were successively film coated by spraying a polymeric dispersion having the following composition (% by weight) :

	Eudragit RL 100:	4.64
	Talc micronised	4.58
20	PEG 6000	2.05
	Ethanol	53.15
	Acetone	35.58

The coating level on weight gain basis (%w/w of the dried components) was set forth in order to obtain diclofenac coated pellets showing the desired *in vitro* release profile.

25 Drug releases were determined spectrophotometrically according to the following method:

USP Apparatus II, Paddle, 900 mL pH 6.8, 125 rpm, 37°C. The release results in Table III represent the average of six replications.

Table III

Diclofenac Loaded Pellets	Coating Level (weight gain %w/w)	Potency (mg/g)	Releases (%)			
			30 min	1h	2h	4h
Ex. 1, process (i)	4	408	53.6	76.9	95.6	101.4
Ex. 1, process (ii)	2.5	418	48.7	63.9	85.9	99.9

30

The results show that diclofenac loaded pellets obtained by powder layering with electrostatic gun (example 1, process ii), require a lower amount of membrane to obtain a release profile that is even lower than the one shown by the corresponding loaded pellets manufactured with the standard powder layering method (Example 1, process i).

CLAIMS

1. A process for applying a layer to a pharmaceutical unit which comprises:
 - (a) spraying the unit with dry particles of drug and/or excipient;
 - (b) applying to the unit a binder comprising a solvent,
 - and
 - (c) drying;
2. A process according to claim 1 wherein the unit and the particles are at different electrical potentials such that electrostatic attraction occurs between them.
3. A process as claimed in claim 2 in which the potential difference is from about 50,000 to about 300,000 volts.
4. A process as claimed in claim 2 or claim 3 in which the unit is electrically neutral.
5. A process as claimed in any one of claims 2 to 4 in which particles are applied by spraying through an electrostatic field onto a plurality of units in a layering drum.
6. A process according to any one of claims 1 to 5 in which the particles and binder are applied to the unit from different directions.
7. A process according to any one of claims 1 to 5 in which the particles and binder are applied to the unit on separate axes, and in the same direction.
8. A process according to any one of claims 1 to 7 in which step (a) is initiated about 20 seconds or less before step (b) is initiated.
9. A process according to any one of claims 1 to 8 wherein loading is carried out continuously by simultaneously performing steps (a) and (b) for a period sufficient to layer the desired amount of powder.
10. A process as claimed in any one of Claims 1 to 9 in which the particles have a maximum size of about 250 microns or less.

11. A process as claimed in any one of Claims 1 to 9 in which the particles have a maximum size of about 150 microns or less.

12. A process as claimed in any one of Claims 1 to 9 in which the particles have a maximum particle size of about 100 microns or less.

13. A process as claimed in any one of the preceding claims in which the unit is a non-pareil seed.

14. A process as claimed in claim in which the non-pareil seeds have a sieve cut ranging from about 14 to about 100 mesh.

15. A process is claimed in any one of the preceding claims in which the binder is polyvinylpyrrolidone, polyethylene glycol, polyvinyl alcohol, hydroxypropylcellulose, hydroxypropylmethylcellulose, hydroxyethylcellulose, methylcellulose, ethylcellulose, polyacrylates, carboxymethyl-cellulose or gelatine or mixtures thereof.

16. A process is claimed in any one of the preceding claims in which the solvent is water.

17. A process as claimed in any one of the preceding claims comprising the following steps

- a) loading inert nonpareil seeds into a suitable layering apparatus,
- b) dry spraying drug and/or excipient particles onto the seeds using a spraying nozzle, optionally with electrostatic attraction, while simultaneously applying a binding solution,
- c) drying the loaded cores during and after step (b).

18. A process as claimed in any one of the preceding claims comprising the further step of film coating the drug loaded unit with one or more polymeric membranes having controlled release, gastroresistance, targeted release or taste masking properties.

19. A substantially spherical unit dosage form obtainable by a process according to any one of claims 1 to 18.

20. Apparatus for layering a pharmaceutical unit, the apparatus comprising a vessel (12) adapted to receive a plurality of units, a powder spraying nozzle (15) for spraying dry

particles at said unit, and means (16) for applying a binder to said unit, said apparatus optionally comprising means for electrostatically attracting powder and unit.

21. Apparatus according to claim 20 wherein said powder spraying nozzle (15) and said means (16) for applying a binder are adapted to act in different directions.

22. Apparatus according to claim 20 wherein said powder spraying nozzle (15) and said means (16) for applying a binder are adapted to act on separate axes and in the same direction.

23. Apparatus according to any of claims 20-22 wherein said means for applying a binder comprises a binder spraying nozzle (16).

24. Apparatus according to any of claims 20-23 wherein said vessel is a rotatable drum (12) having a substantially horizontal axis (13).

25. Apparatus according to claim 24 and further including an inlet (42) for ventilation air and an outlet (44) for said air, said inlet and outlet being mounted on a non-rotational end wall of said drum (12).

26. Apparatus according to claim 25 wherein said inlet (42) comprises a duct extending in the direction of said axis (13), and a plurality of side ducts (43) adapted to extend in the direction of said unit.

27. Apparatus according to any one of claim 24 to 26 wherein said powder spraying nozzle (15) and means (16) for applying a binder are within said drum (12).

28. Apparatus according to claim 27 wherein said powder spraying nozzle (15) and means (16) for applying a binder are mounted on a non-rotational end wall of said drum.

29. Apparatus according to any one of claims 20-28 wherein the orientation of said powder spraying nozzle (15) is adjustable.

30. Apparatus according to any of claims 20-29 wherein the distance from the powder spraying nozzle (15) to said unit is adjustable.

31. Apparatus according to any of claims 20-30 wherein the distance from the powder spraying nozzle (15) to said unit is from 100 to 150mm.
32. Apparatus according to any one of claims 29 to 31 wherein said powder spraying nozzle (15) is adjustable in real time.
33. Apparatus according any of claims 20-32 wherein the orientation of said binder spraying nozzle (16) is adjustable.
34. Apparatus according to claim 33 wherein the distance of said binder spraying nozzle (16) to said unit is adjustable.
35. Apparatus according to any of claims 20-34 wherein the distance of said binder spraying nozzle (16) to said unit is from 250mm to 400mm.
36. Apparatus according to any one of claims 33 to 35 wherein said binder spraying nozzle is adjustable in real time.
37. Apparatus according to any of claims 20 to 36 wherein said binder spraying nozzle is adapted to spray a plurality of liquids.
38. Apparatus according to any of claims 20-37 adapted to film coat a plurality of layered seed units each less than 3000 μ m in diameter.
39. Apparatus according to any of claims 20-38 in which the powder spray nozzles comprise means for applying an electrostatic charge to the powder when sprayed.
40. Apparatus according to any of claims 20-39 in which the vessel is electrically earthed.

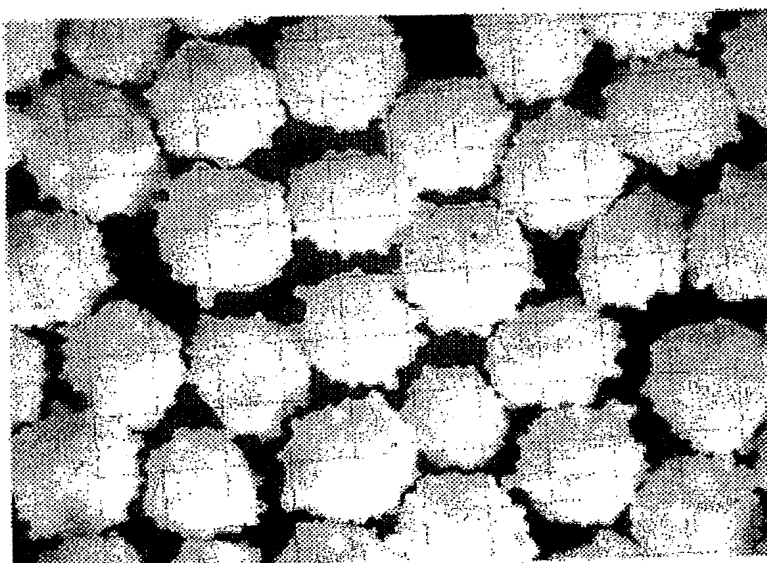


FIG. 1

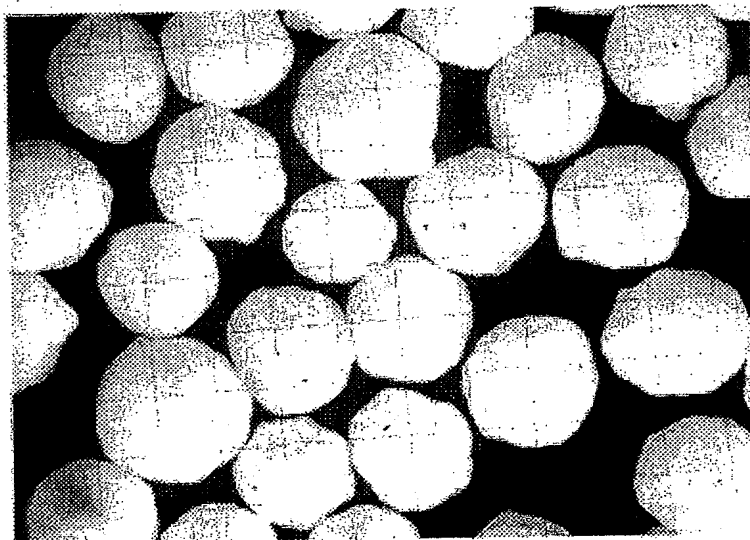
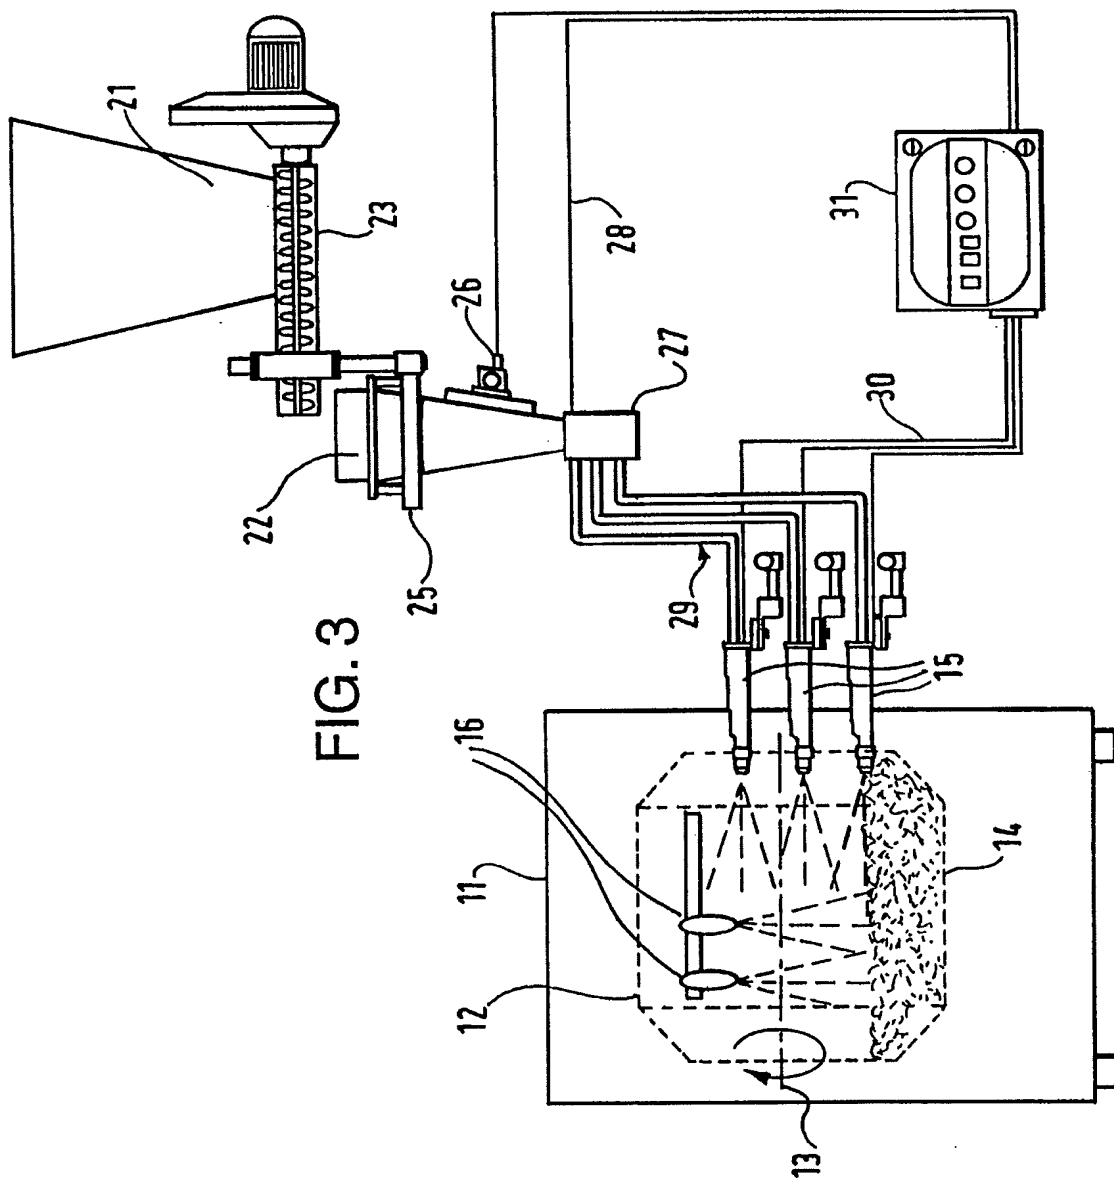


FIG. 2



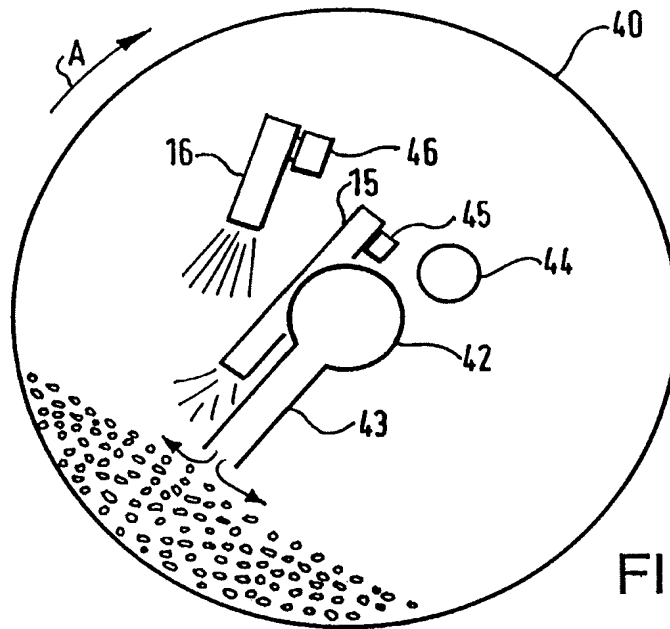


FIG. 4

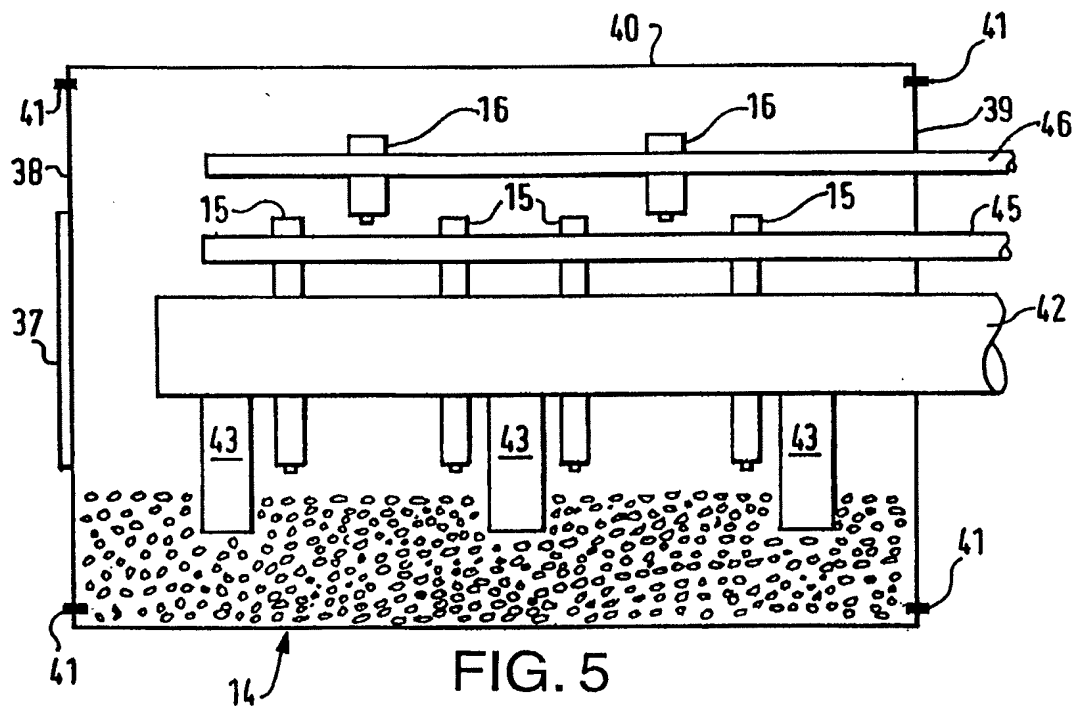


FIG. 5

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 99/03512

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 A61K9/50 B01J2/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 A61K B01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 546 846 A (THERAPICON SRL) 16 June 1993 (1993-06-16) page 3; example 1 ---	1,9-17, 19
X	US 5 411 745 A (OSHLACK ET AL.) 2 May 1995 (1995-05-02) column 6, line 31 - line 64 claim 22 ---	1,9-20, 23,38
A	US 5 132 142 A (JONES ET AL.) 21 July 1992 (1992-07-21) the whole document column 6, line 65 - line 68 --- -/--	1,9-20, 23,38

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
"&" document member of the same patent family

Date of the actual completion of the international search

30 August 1999

Date of mailing of the international search report

03/09/1999

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Benz, K

INTERNATIONAL SEARCH REPORT

In International Application No
PCT/EP 99/03512

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 148 772 A (PHARMINDEV LTD.) 17 July 1985 (1985-07-17) page 1, line 1 - line 6 page 11, line 14 - page 12, line 15 figure 2 ----	20,22, 30,33, 34,39,40
A	GB 1 561 100 A (F. HOFFMANN-LA ROCHE) 13 February 1980 (1980-02-13) page 12, line 41 - page 13, line 16 ----	2-5
A	WO 92 14451 A (HOECHST UK LIMITED) 3 September 1992 (1992-09-03) page 14, line 24 - page 15, line 1 figure 1 -----	2-5

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 99/03512

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 546846	A	16-06-1993	IT 1252185 B DE 69217020 D DE 69217020 T ES 2099226 T GR 3022416 T JP 5320044 A MX 9207171 A	05-06-1995 06-03-1997 31-07-1997 16-05-1997 30-04-1997 03-12-1993 31-01-1994
US 5411745	A	02-05-1995	AU 2436395 A EP 0711152 A JP 9500914 T WO 9531972 A	18-12-1995 15-05-1996 28-01-1997 30-11-1995
US 5132142	A	21-07-1992	AT 118368 T DE 69201386 D DE 69201386 T DK 505319 T EP 0505319 A ES 2068696 T JP 5103971 A	15-03-1995 23-03-1995 14-06-1995 17-07-1995 23-09-1992 16-04-1995 27-04-1993
EP 148772	A	17-07-1985	DK 12085 A FI 850072 A JP 60227855 A US 4702932 A	11-07-1985 11-07-1985 13-11-1985 27-10-1987
GB 1561100	A	13-02-1980	US 4029758 A US 4029757 A US 4031200 A AT 365449 B AT 923976 A CA 1085295 A CH 624846 A DE 2656387 A DK 562276 A,B, FI 763597 A,B, FR 2335206 A GR 81307 A JP 1395182 C JP 52076419 A JP 62000125 B LU 76378 A NL 7613922 A,B, NZ 182871 A PH 14489 A PT 65960 A,B SE 438597 B SE 7614123 A US 4072551 A US 4126502 A ZA 7607136 A PH 13712 A US 4126503 A AU 2051976 A PH 13423 A US 4083741 A PH 16921 A PH 12959 A	14-06-1977 14-06-1977 21-06-1977 11-01-1982 15-06-1981 09-09-1980 31-08-1981 30-06-1977 16-06-1977 16-06-1977 15-07-1977 11-12-1984 11-08-1987 27-06-1977 06-01-1987 18-01-1978 17-06-1977 25-10-1979 07-08-1981 01-01-1977 29-04-1985 25-08-1977 07-02-1978 21-11-1978 26-10-1977 09-09-1980 21-11-1978 22-06-1978 23-04-1980 11-04-1978 12-04-1984 19-10-1979

INTERNATIONAL SEARCH REPORT

Information on patent family members

II. International Application No

PCT/EP 99/03512

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 1561100 A		US 4307555 A	29-12-1981
		US 4349531 A	14-09-1982
		PH 13426 A	23-04-1980
		US 4165998 A	28-08-1979
		PH 17318 A	20-07-1984
		US 4069084 A	17-01-1978
		PH 12825 A	31-08-1979
		US 4069086 A	17-01-1978
		AU 514195 B	29-01-1981
		BE 849377 A	14-06-1977
		CA 1087974 A	21-10-1980
		PH 13279 A	27-02-1980
		PH 16400 A	22-09-1983
		US 4128445 A	05-12-1978
		US 4197289 A	08-04-1980
		PH 13306 A	06-03-1980
		US 4332789 A	01-06-1982
		PH 13439 A	23-04-1980
WO 9214451 A	03-09-1992	GB 2253164 A	02-09-1992
		AT 126431 T	15-09-1995
		AU 653989 B	20-10-1994
		AU 1208492 A	15-09-1992
		CA 2081921 A	23-08-1992
		DE 69204127 D	21-09-1995
		DE 69204127 T	04-04-1996
		DK 526606 T	27-12-1995
		EP 0526606 A	10-02-1993
		ES 2078036 T	01-12-1995
		GR 3018080 T	29-02-1996
		HU 66848 A,B	30-01-1995
		JP 5508337 T	25-11-1993
		PL 296624 A	02-11-1993
		US 5656080 A	12-08-1997
		US 5470603 A	28-11-1995